

## Notes:


Working Pressure: 0.5 to 10 bar
 Ambient Temperature: -10 to +60 C
 Medium Temperature: +5 to +50 C

4. Mounting: Basic Cylinder5. Bore Diameter: 32.006. Stroke Length: 25.00





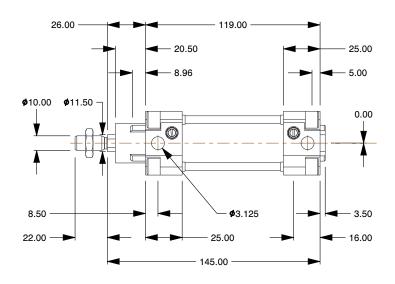



This file and any associated information and specificat	ions	are
provided for reference and evaluation purposes only	and	is
subject to change without notice.	ma	kes

no representations, warranties, or guarantees as to the appropriateness, accuracy, completeness, or suitability for any purpose of the file, information or specifications. You are solely responsible for the use of the file, information, or specifications.

SCALE 0.388


PRODUCT NAME	
Air Cylinders Double Acting Cylinder	
As per ISO 6431/CETOP RP43P, RP53P Standards	


UNIT	
MILLIMETER	

PART NUMBER: 12032025L

ISSUED 20-09-2023

SHEET 1 of 1



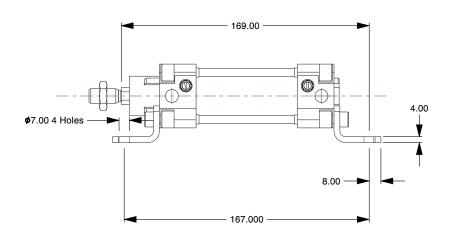

This file and any associated information and specifications are provided for reference and evaluation purposes only and is subject to change without notice. \_\_\_\_\_ makes

no representations, warranties, or guarantees as to the appropriateness, accuracy, completeness, or suitability for any purpose of the file, information or specifications. You are solely responsible for the use of the file, information, or specifications.

This document is the property of ... and the information it contains may not be reproduced, disclosed, or shared with any third party without the expressed written permission of

SCALE 0.388

PRODUCT NAME
Air Cylinders Double Acting Cylinder
As per ISO 6431/CETOP RP43P, RP53P Standards

D 6431/CETOP RP43P, RP53P Standards ISSUED 20-09-2023

PART NUMBER: 12032025L SHEET 1 of 1

MILLIMETER